

# Computer Training Tables

## Technical Sales Brochure

Choose NOVA Solutions' Computer Training Tables to transform your learning spaces into hubs of innovation and collaboration. With a focus on adaptability, technology integration, and durability, these tables are the ideal solution for dynamic and forward-thinking educational institutions.



26-RL307230TL-RWGSC



26-RL303630TL FPA2124NK



Trolley™ Up



Trolley™ Down

26-RL247230AL-XC TE0728NK



(217) 342-7070

[www.novadesk.com](http://www.novadesk.com)

[sales@novasolutionsinc.com](mailto:sales@novasolutionsinc.com)

# Computer Training Tables

## with iMod™ Wire Management System

### How To Order

- Select model number  
Ex: 26-RL303630TL  
    - To specify an ADA Height unit, change height from 30 to 32 in model number.  
ADA Height Ex: 26-RL303632TL
    - To specify an ADA Lift unit, change model number from R to A.. Available on single units with T-Legs only.  
ADA Lift Ex: 26-AL303630TL
  - Select metal color for legs, laminate color for worksurface, and laminate base color for iMod™ compartment  
 Note: Laminate iMod™ modesty will match base color, and Perforated Metal iMod™ modesty will match metal color.  
  
 Ex: PBL     030     174  
           Metal    Worksurface    Base
- Optional Selections:**
- Casters or height-adjustable legs (Arched or T-Legs only)  
 For casters, add "-C" to the end of model number.  
 Ex: 26-RL244230TL-C  
 For height-adjustable legs, add "-H" to the model number.  
 Ex: 26-RL244230TL-H
  - Select Visual Display Options  
 Ex: TE0728NK (The Trolley™ EXL with NOVA keyboard drawer)
  - Select Options and Factory Installed Accessories  
 Ex: RWGSC (Star cut wire grommet)

**Please Note:**

Power strip, wire management, and CPU Holder are included with iMod™ Tables.

To indicate no power strip, add "-X" to model number.

To indicate no CPU Holder, add "-XC" to model number.

For alternate CPU holder sizes, contact Customer Service

### Visual Display Options

#### The Trolley™ Monitor Lift System

Maximum dimensions for widescreen:

E: 2 ½" D x 18 ⅞" W x 14 ½" H (63.5mm D x 479.4mm W x 368.3mm H)

EXL: 2 ½" D x 22 ⅞" W x 14 ½" H (63.5mm D x 581mm W x 368.3mm H)

NOTE: Maximum distance from center of wall mount VESA plate to bottom of monitor is 6 ¾" (171mm)



#### Downview™

Maximum monitor dimensions:

16x21 widescreen viewport: 20 ⅞" W x 12 ½" H (511mm W x 318mm H)

18x21 widescreen viewport: 20 ⅞" W x 14 ½" H (511mm W x 368mm H)

21x24 widescreen viewport: 23 ⅞" W x 19" H (587mm W x 482mm H)

#### Surface Mount Arm

Maximum monitor dimensions:

Surface Mount Arm: Up to 24" widescreen

Articulating Surface Mount Arm: Up to 35" widescreen

Maximum monitor weight:

Surface Mount Arm: 21 lbs

Articulating Surface Mount Arm: 33 lbs

### CPU Storage Widths Standard CPU Holder adjusts from 4 ¼" - 7 ½" W

#### Downview™ - 21" Wide Viewport

36" W Tables: 7" Max Width

42" W Tables: 7 ½" Max Width

72" W Tables: 7" Max Width

#### Downview™ - 24" Wide Viewport

36" W Tables: 4 ½" Max Width

42" W Tables: 7 ½" Max Width

72" W Tables: 4 ½" Max Width

#### Trolley™ E

36" W Tables: 7" Max Width

42" W Tables: 7 ½" Max Width

72" W Tables: 7" Max Width

#### Trolley™ EXL

36" W Tables: 4 ½" Max Width\*

42" W Tables: 7 ½" Max Width

72" W Tables: 4 ½" Max Width\*


#### Standard and SMA

All Table Widths: 7 ½" Max Width

\* Shipped with Medium Profile CPU Holder.

Adjustment range: 3 ¼" to 5 ½" W

### Model Number Structure



**26** - **RL**     **243630**     **TL**  
 Series     Type     Size     Leg Style  
 RL=Rectangle Top / Laminate iMod™  
 RM=Rectangle Top / Metal iMod™  
 AL=ADA Lift / Laminate iMod™  
 AM=ADA Lift / Metal iMod™  
 D x W x H  
 TL=T-Leg  
 AL=Arched Leg

### Leg Base Styles & Options

Styles



T-Leg



Arched Leg


Options



T-Leg with Casters (-C)



Arched Leg with Casters (-C)



Height-adjustable Legs (-H)  
Adjustable height from 27"-37"

### Features

- Solutions for all learning environments
- Visual Display Options available
- ADA compliant tables available
- Standard edge detail: 2mm Flat PVC. Matching edge banding colors
- Thermofused Melamine Worksurface; 1" Thick
- iMod™ compartment with removable modesty panels (locking optional; available in laminate or metal) for easy wire management
- Wire management system and power strip included per user
- Adjustable CPU Holder
- Manufactured with recycled post-industrial materials




Assembly required  
for all products on  
this page

# Computer Training Tables with iMod™ Wire Management System

## Computer Training Tables with Laminate iMod™ Modesty


· Standard CPU holder right · Add "-LC" for left CPU holder and "-XC" for no CPU holder

### T-Legs




D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Two leg bases - Single laminate modesty		
24 x 36 1/8 x 30	18.3 / 124	26-RL243630TL
24 x 42 x 30	21.2 / 131	26-RL244230TL
24 x 48 x 30	24.0 / 138	26-RL244830TL
Three leg bases - Double laminate modesty		
26 x 36 1/8 x 30	19.8 / 126	26-RL263630TL
26 x 42 x 30	22.9 / 134	26-RL264230TL
26 x 48 x 30	25.9 / 142	26-RL264830TL
Four leg bases - Double laminate modesty		
30 x 36 1/8 x 30	22.6 / 133	26-RL303630TL
30 x 42 x 30	26.1 / 142	26-RL304230TL
30 x 48 x 30	29.6 / 151	26-RL304830TL

### T-Legs




D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Three leg bases - Double laminate modesty		
24 x 71 1/8 x 30	35.7 / 279	26-RL247230TL
26 x 71 1/8 x 30	38.4 / 283	26-RL267230TL
30 x 71 1/8 x 30	43.9 / 292	26-RL307230TL

### Arched Legs



D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Two leg bases - Single laminate modesty		
24 x 36 1/8 x 30	18.3 / 124	26-RL243630AL
24 x 42 x 30	21.2 / 131	26-RL244230AL
24 x 48 x 30	24.0 / 138	26-RL244830AL
Three leg bases - Double laminate modesty		
26 x 36 1/8 x 30	19.8 / 126	26-RL263630AL
26 x 42 x 30	22.9 / 134	26-RL264230AL
26 x 48 x 30	25.9 / 142	26-RL264830AL
Four leg bases - Double laminate modesty		
30 x 36 1/8 x 30	22.6 / 133	26-RL303630AL
30 x 42 x 30	26.1 / 142	26-RL304230AL
30 x 48 x 30	29.6 / 151	26-RL304830AL

### Arched Legs




D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Three leg bases - Double laminate modesty		
24 x 71 1/8 x 30	35.7 / 279	26-RL247230AL
26 x 71 1/8 x 30	38.4 / 283	26-RL267230AL
30 x 71 1/8 x 30	43.9 / 292	26-RL307230AL

## Computer Training Tables with Perforated Metal iMod™ Modesty


· Standard CPU holder right · Add "-LC" for left CPU holder and "-XC" for no CPU holder

### T-Legs




D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Two leg bases - Single metal modesty		
24 x 36 1/8 x 30	18.3 / 124	26-RM243630TL
24 x 42 x 30	21.2 / 131	26-RM244230TL
24 x 48 x 30	24.0 / 138	26-RM244830TL
Three leg bases - Double metal modesty		
26 x 36 1/8 x 30	19.8 / 126	26-RM263630TL
26 x 42 x 30	22.9 / 134	26-RM264230TL
26 x 48 x 30	25.9 / 142	26-RM264830TL
Four leg bases - Double metal modesty		
30 x 36 1/8 x 30	22.6 / 133	26-RM303630TL
30 x 42 x 30	26.1 / 142	26-RM304230TL
30 x 48 x 30	29.6 / 151	26-RM304830TL

### T-Legs




D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Three leg bases - Double metal modesty		
24 x 71 1/8 x 30	35.7 / 279	26-RM247230TL
26 x 71 1/8 x 30	38.4 / 283	26-RM267230TL
30 x 71 1/8 x 30	43.9 / 292	26-RM307230TL

### Arched Legs



D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Two leg bases - Single metal modesty		
24 x 36 1/8 x 30	18.3 / 124	26-RM243630AL
24 x 42 x 30	21.2 / 131	26-RM244230AL
24 x 48 x 30	24.0 / 138	26-RM244830AL
Three leg bases - Double metal modesty		
26 x 36 1/8 x 30	19.8 / 126	26-RM263630AL
26 x 42 x 30	22.9 / 134	26-RM264230AL
26 x 48 x 30	25.9 / 142	26-RM264830AL
Four leg bases - Double metal modesty		
30 x 36 1/8 x 30	22.6 / 133	26-RM303630AL
30 x 42 x 30	26.1 / 142	26-RM304230AL
30 x 48 x 30	29.6 / 151	26-RM304830AL

### Arched Legs




D x W x H (in.)	ft <sup>3</sup> / lbs	Model
Three leg bases - Double metal modesty		
24 x 71 1/8 x 30	35.7 / 279	26-RM247230AL
26 x 71 1/8 x 30	38.4 / 283	26-RM267230AL
30 x 71 1/8 x 30	43.9 / 292	26-RM307230AL



Assembly required  
for all products on  
this page

# Visual Display Options

## Computer Training Tables



### The Trolley™

- Installation required
- Maximum distance from center of wall mount VESA plate to bottom of monitor is 6 3/4" (171mm)

#### The Trolley™ E

Maximum Dimensions for Widescreen:  
2 1/2" D x 18 7/8" W x 14 1/2" H  
up to 20" widescreen

#### The Trolley™ EXL

Maximum Dimensions for Widescreen:  
2 1/2" D x 22 7/8" W x 14 1/2" H  
up to 24" widescreen

- Patented Access door automatically opens and closes with the push of a button
- Low voltage electrical motor to lift & lower monitor
- Intelligent Motion Technology™ provides operational intuition

Model	Wt(lbs)	Description
-------	---------	-------------

#### With NOVA Keyboard Drawer


NOVA Keyboard Drawer installed in assembled units only.

**International Customers:** The Trolley™ includes Universal Power Control Units, compatible with all power requirements inside and outside the U.S.

TE0724NK	48	Trolley™ E & NOVA Keyboard Drawer
----------	----	-----------------------------------

TE0728NK	48	Trolley™ EXL & NOVA Keyboard Drawer
----------	----	-------------------------------------

Available with  **NOVA Linked™** see page 6



### Downview™

- Installation required

#### 16" D x 21" W viewport (Widescreen)

Maximum Dimensions for Widescreen: 20 1/8" W x 12 1/2" H  
up to 21" widescreen

24" min. worksurface depth

#### 18" D x 21" W viewport (Widescreen)

Maximum Dimensions for Widescreen: 20 1/8" W x 14 1/2" H  
up to 21" widescreen

26" min. worksurface depth

#### 21" D x 24" W viewport (Widescreen)

Maximum Dimensions for Widescreen: 23 1/8" W x 19" H  
up to 24" widescreen

30" min. worksurface depth

- Tinted, tempered glass viewport
- Keeps monitor under glass below worksurface
- Ergonomic viewing angle

Model	Wt(lbs)	Description
-------	---------	-------------

#### With NOVA Keyboard Drawer


Downview™ & NOVA Keyboard Drawer installed in assembled units only.

Optional Privacy/Glare visor sold separately, see page 60 for pricing.

FPA1621NK	35	16" D x 21" W Downview™ & NOVA Keyboard Drawer
-----------	----	--


FPA1821NK	35	18" D x 21" W Downview™ & NOVA Keyboard Drawer
-----------	----	--

FPA2124NK	39	21" D x 24" W Downview™ & NOVA Keyboard Drawer
-----------	----	--



### Surface Mount Arm

- Installation required



#### Surface Mount Arm

Maximum Weight: 21 lbs  
Maximum Dimensions: Up to 24" widescreen

#### Articulating Surface Mount Arm

Maximum Weight: 33 lbs  
Maximum Dimensions: Up to 35" widescreen

- Securely fastens monitor to worksurface
- Height and tilt adjustable

Model	Wt(lbs)	Description
-------	---------	-------------

#### With NOVA Keyboard Drawer

NOVA Keyboard Drawer installed in assembled units only.

SMA0203NK	13	SMA & NOVA Keyboard Drawer
-----------	----	----------------------------

ASMA0203NK	22	Articulating SMA & NOVA Keyboard Drawer
------------	----	---



ASSEMBLY REQUIRED

# Options & Accessories

## for Computer Tables with iMod™ Wire Management


### ADA Lift Option

Electrically adjustable base height from 30" with 2 1/2" travel. Activated with buttons mounted beneath worksurface.

- To specify an ADA Lift unit, change model number from R to A  
ADA Lift Ex: 26-AM303630TL
- Note: ADA Lift / Column Legs are standard Polished Black metal
- Available on single units with T-Legs only

### Options for Computer Tables

#### Locking iMod™ Modesty




#### Model

To add locking iMod™ modesty, add "-L" to the end of model number

- Available in both Laminate or Perforated Metal

-L

#### Height-adjustable Legs



To add height-adjustable legs, add "-H" to the end of model number

- Adjustable height from 27"- 37"
- Can be paired with casters

-H

#### Casters




#### D x W x H (in.) Model

To add casters, add "-C" to the end of model number  
Does not increase height of table  
Required per leg / Set of 2 (1 locking, 1 non-locking)

2 5/8" x 1 3/4" x 3 1/4"

-C

#### Privacy Panels for Single Table



#### D x W x H (in.) ft<sup>3</sup> / lbs Model

For factory prep, must specify "PP" on table model number.  
Specify base color only. 6" radius on front. Field installed.

24 x 36 x 15 1.5 / 37 26-PP243615

24 x 42 x 15 1.7 / 40 26-PP244215

24 x 48 x 15 1.9 / 42 26-PP244815

26 x 36 x 15 1.5 / 38 26-PP263615

26 x 42 x 15 1.7 / 41 26-PP264215

26 x 48 x 15 1.9 / 43 26-PP264815

30 x 36 x 15 1.5 / 42 26-PP303615

30 x 42 x 15 1.7 / 44 26-PP304215

30 x 48 x 15 1.9 / 47 26-PP304815

#### Privacy Panels for Double Table



24 x 71 x 15 1.8 / 51 26-PP247115


26 x 71 x 15 1.8 / 52 26-PP267115

30 x 71 x 15 1.8 / 55 26-PP307115

### Factory Installed Accessories

Must specify location of grommet / power center at time of order

#### Factory Prepared NOVA Keyboard Drawer



#### Dimensions (in.)

Keyboard length to fit table ordered.

Only ordered when NO Visual Display Option is chosen.

24" - 34" wide

#### Model

NK

#### Rectangular Wire Grommet



Rectangular black plastic grommet cover is removable for easy wire management

1 7/8" D x 3 1/4" W

WG1080

#### Star Cut Wire Grommet



Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through

2 3/4" Diameter

RWGSC

#### Pop-up Power Center



Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.

3 3/4" D x 5" W

11225PP

#### Pop-up Power / Data Center



One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.

3 3/4" D x 5" W

11225PD

#### Pop-up Power / USB Charging Center



One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed.

3 3/4" D x 5" W

11225PC

#### Round Flush Power Center



Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed.

4" Diameter

3359PP

#### Round Flush Power / USB Charging Center



One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed.

4" Diameter

3359PC

#### Round Power Center



One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed.

2" Diameter

3825P

# NOVALinked™ Components

NOVALinked™ is a networking system that provides complete control of NOVA's Trolley™ monitor lifts in a classroom or training room setting. Utilizing a Crestron, Extron, AMX or other major brand controller, or an ISI component, instructors can raise or lower all of the Trolley™ monitor lifts in the classroom simultaneously.



### LCI - Linking Control Interface

The LCI is required for all NOVALinked™ installations. One LCI is required to control each Trolley™ monitor lift. It can be located in an inconspicuous location on each desk/table or within the total access iMod™ compartment (if available).

**1 9/16" D x 4" W x 1 3/4" H**

**AC-LCI**



### CSIM - Control System Interface Module

The CSIM is required for "wired" NOVALinked™ installations. One CSIM is needed for every thirty (30) LCI units / Trolley™ monitor lifts. Includes a 24V = 1.67A, 40W MAX Power Supply with Cord.

**1 9/16" D x 4 1/8" W x 2 15/16" H**

**AC-CSIM**



### JCN - Junction

The JCN is a parallel 3 way splitter for the NOVALinked™ System. One JCN required per row. Designed for use only with the NOVALinked™ System.

**1 9/16" D x 4" W x 1 3/4" H**

**AC-JCN3 (Three RJ45 ports)**



### CAT6 Patch Cable

CAT6 molded boot patch cable.

**AC-CAT6-1 (1ft)**


**AC-CAT6-2 (2ft)**

**AC-CAT6-5 (5ft)**

**AC-CAT6-7 (7ft)**

**AC-CAT6-10 (10ft)**

**AC-CAT6-14 (14ft)**



### ISI - Independent Switching Interface

The ISI allows full control of the On/Off and Up/Down functions of the NOVALinked™ System without interfacing with a control system. The ISI Module is designed to be housed in the lectern-based Trolley™ control panel.

**AC-ISI (for Wired Systems)**

**AC-ISIRF (for Wireless RF Systems)**

## Components for Wireless NOVALinked™



### TXM - Transmitter

The Transmitter allows wireless control of the Trolley™, and is housed in the lectern or any other location in the room. The Transmitter connects to the Controller or ISI, and each one has a unique frequency address. It sends separate commands for On, Off, Up and Down.

**AC-TXM**



### RCVR - Receiver


One Receiver required per row of desks, including the last row.

**AC-RCVR**

**NOTE:** If not using a major brand controller, order ISI component for [wireless systems](#) (AC-ISIRF)

**NOTE:** Typically one CSIM is required for every 30 LCI units in the classroom. Each Trolley™ unit requires one LCI (even with the wireless configuration).

All NOVALinked™ components shown on this page.

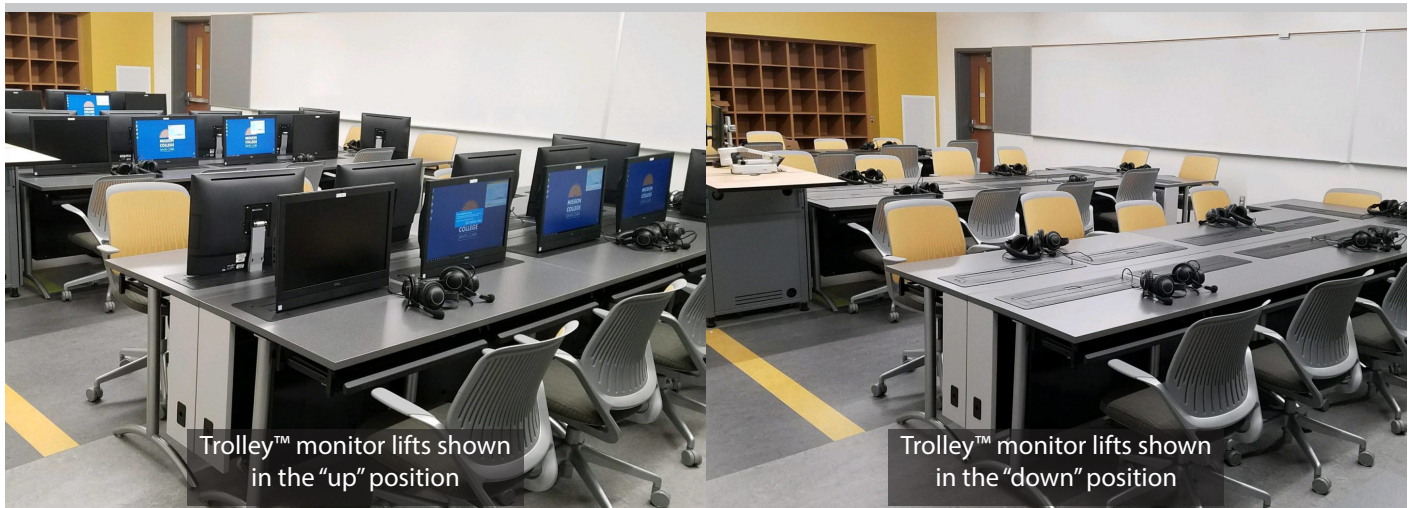

Trolley™ monitor lifts shown in the "up" position

Trolley™ monitor lifts shown in the "down" position

# NOVA Linked™ Sample Layouts



**RF Transmitter**, typically located on lectern (Qty 1)  
Has a unique frequency.  
**AC-TX01**



**Receiver**  
1 per row (Qty 4)  
**AC-RCVR**



**Independent Switching Interface**, typically located on lectern (Qty 1)  
**AC-ISIF** (for Wireless RF Systems)




**Linking Control Interface**  
1 per Trolley, except in Lectern when using a CSIM or Transmitter.  
If Lectern within a Trolley with CSIM or Transmitter, then no need for an LCI.  
(Qty 20)  
**AC-LCI**



**GATE Patch Cable**  
1ft or 2ft cable needed to run from RCVR to the 1st LCI in each row  
(Qty 4)  
**AC-GATE-2**



**5ft or 7ft cables needed to run from LCI to LCI in each row**  
(Qty 16)  
**AC-GATE-5**

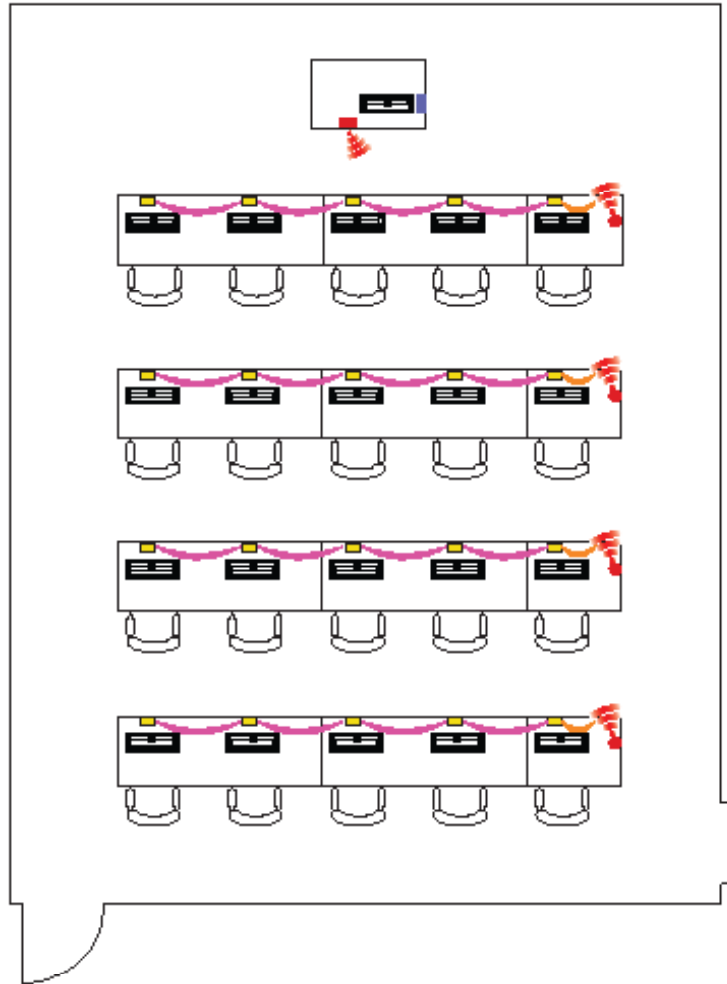

# Hardwiring

## How To Order NOVA Hardwiring Components


1. Select a standard model
  2. Complete room layout
  3. Select power entry
  4. Select jumper length
  5. Select receptacle block
  6. Specify mounting bracket quantity for all receptacle blocks
- NOTE:** Mounting brackets with receptacle block always located behind CPU storage

## Standard Features

- 4-wires, 2 circuits, 20 Amps each (Circuit 1 & 2 only)
  - 13-Duplex receptacles per circuit, 26-15 Amp Duplex receptacles per power infeed maximum
  - Easy to install and reconfigure
  - Requires less space
  - UL Listed as a Manufactured Wiring System
  - More economical than 8-Wire Systems
- NOTE:** For hardwiring in New York City, San Francisco, or Chicago - contact Sales

## Electrical Components


### Receptacle Block



**Model**  
Complete the model number by indicating its circuit number (Circuit 1 or Circuit 2)  
Ex: A receptacle block for Circuit 1 would be model number BE41917-3-A-1-8B.  
Mounting bracket sold separately. See below.

BE41917-3-A-\_\_-8B

### Female-to-Female Jumper



Length	Model
6"	BE41920-3-6
12"	BE41920-3-12
18"	BE41920-3-18
22"	BE41920-3-22
24"	BE41920-3-24
30"	BE41920-3-30
36"	BE41920-3-36
42"	BE41920-3-42
48"	BE41920-3-48
54"	BE41920-3-54
60"	BE41920-3-60
66"	BE41920-3-66
72"	BE41920-3-72
78"	BE41920-3-78
84"	BE41920-3-84
90"	BE41920-3-90
96"	BE41920-3-96
102"	BE41920-3-102
108"	BE41920-3-108
114"	BE41920-3-114
120"	BE41920-3-120
126"	BE41920-3-126
132"	BE41920-3-132
138"	BE41920-3-138
144"	BE41920-3-144

### Receptacle to Receptacle Block Connector



BE41919-3


### 4-Way "H" Connector



BE41921-3

### Spring Clip Mounting Bracket


Screws included



BE41955


### Transition wall power plate

Power entry not included



BE42171-3-06

### Power Entry



36"	BE41922-3-36
42"	BE41922-3-42
48"	BE41922-3-48
54"	BE41922-3-54
60"	BE41922-3-60
66"	BE41922-3-66
72"	BE41922-3-72
78"	BE41922-3-78
84"	BE41922-3-84
90"	BE41922-3-90
96"	BE41922-3-96
102"	BE41922-3-102
108"	BE41922-3-108
114"	BE41922-3-114
120"	BE41922-3-120
126"	BE41922-3-126
132"	BE41922-3-132
138"	BE41922-3-138
144"	BE41922-3-144

## Sample Layout

